

Short and Ultra Short Throw LCD Projectors

For Business and Education

We have always been at the forefront of high quality projection technology through our dedication to market leading innovation. Having achieved a dominant market share in EMEA for the Ultra Short Throw segment, we are now expanding our product offering to the Short Throw sector.[†] This means that we can offer solutions for the entire range of Short Throw distances to suit every situation and budget.













The man is pointing at a large projection screen. The screen displays two pie charts. The left chart is titled 'Industry sectors' and the right chart is titled 'Service support'. Below the charts is a button labeled 'Further analysis >>'. The projector is a Hitachi LCD projector, and the screen is a large LCD screen.

Industry sectors	Service support
Education	Internet
Export	IT
Finance	Online
Other	
Public Sector	
MOD	

[†] PMA 2009




HITACHI
Inspire the Next

	 	 	 							
	EDUCATION			MULTI PURPOSE						
TECHNICAL SPECIFICATIONS	SHORT THROW	ULTRA SHORT THROW		SHORT THROW			ULTRA SHORT THROW			
MODEL	ED-D10N/ED-D11N	ED-AW100N/ED-AW110N	ED-A101/ED-A111	CP-D10	CP-DW10N	CP-D20	CP-AW100N	CP-A100	CP-A200	
OPTICAL										
Resolution	XGA (1024 x 768)	WXGA (1280 x 800)	XGA (1024 x 768)	XGA (1024 x 768)	WXGA (1280 x 800)	XGA (1024 x 768)	WXGA (1280 x 800)	XGA (1024 x 768)	XGA (1024 x 768)	
Brightness	2000 ANSI Lumens (Bright Mode) 1500 ANSI Lumens (Normal Mode)	2000 ANSI Lumens (Bright Mode) 1500 ANSI Lumens (Normal Mode)	2000 ANSI Lumens (Bright Mode) 1500 ANSI Lumens (Normal Mode)	2000 ANSI Lumens (Normal Mode) 1500 ANSI Lumens (Eco Mode)	2000 ANSI Lumens (Normal Mode) 1500 ANSI Lumens (Eco Mode)	2700 ANSI Lumens (Normal Mode) 2000 ANSI Lumens (Eco Mode)	2000 ANSI Lumens (Normal Mode) 1500 ANSI Lumens (Eco Mode)	2500 ANSI Lumens (Normal Mode) 2000 ANSI Lumens (Eco Mode)	3000 ANSI Lumens (Normal Mode) 2500 ANSI Lumens (Eco Mode)	
Contrast ratio	500:1	500:1	500:1	500:1	500:1	600:1	500:1	500:1	500:1	
Lens	Manual focus	Manual focus	Free shaped lens & motorised free shaped mirror	Manual focus	Manual focus	Manual focus	Manual focus	Free shaped lens & motorised free shaped mirror	Free shaped lens & motorised free shaped mirror	
Mirror	–	Yes (motorised)	Yes (motorised)	–	–	–	Yes (motorised)	Yes (motorised)	Yes (motorised)	
Lamp life	3000 hours (Bright Mode)/4000 hours (Normal Mode)* 60~100" (152~254cm)	3000 hours (Bright Mode)/4000 hours (Normal Mode)* 60~100" (152~254cm)	3000 hours (Bright Mode)/4000 hours (Normal Mode)* 60~100" (152~254cm)	3000 hours (Normal Mode)/4000 hours (Eco Mode)* 60~100" (152~254cm)	3000 hours (Normal Mode)/4000 hours (Eco Mode)* 60~100" (152~254cm)	3000 hours (Normal Mode)/4000 hours (Eco Mode)* 60~100" (152~254cm)	3000 hours (Normal Mode)/4000 hours (Eco Mode)* 60~100" (152~254cm)	2000 hours (Normal Mode)/3000 hours (Eco Mode)* 60~100" (152~254cm)	3000 hours (Normal Mode)/4000 hours (Eco Mode)* 60~100" (152~254cm)	
Keystone correction	Fixed, 5.3:-1 upward shift	Fixed, 5.1:-1 upward shift	Fixed, 10:-2.2 upward shift	Fixed, 5.3:-1 upward shift	Fixed, 5.1:-1 upward shift	Fixed, 10:-1 upward shift	Fixed, 5.1:-1 upward shift	Fixed, 10:-2.2 upward shift	Fixed, 10:-2.2 upward shift	
Distance to width ratio	0.56:1 (fixed)	0.47:1 (fixed)	0.35:1 (fixed)	0.57:1 (fixed)	0.5:1 (fixed)	0.5:1 (fixed)	0.47:1 (fixed)	0.35:1 (fixed)	0.35:1 (fixed)	
COMPATIBILITY										
Computer compatibility	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, SXGA, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, SXGA, UXGA Compressed, MAC 16"	IBM Compatible VGA, SVGA, XGA, SXGA, UXGA Compressed, MAC 16"	
Composite/S-Video	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43/PAL60	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43	NTSC/PAL/SECAM/PAL-M/PAL-N/NTSC4.43	
Component Video	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p(720p@60Hz), 1125i(1080i@50/60Hz)	SDTV: 480i, 480p, 576i, 576p HDTV: 720p(60/50/60Hz), 1080i@50/60Hz, 1080p(60/50/60Hz)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p(720p@60Hz), 1125i(1080i@50/60Hz)	
HDMI Video	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)	–	–	–	–	–	–	–	
Plug & Play	DDC2B (RGB1 Input)	DDC2B (RGB1 Input)	DDC2B	DDC2B	DDC2B (RGB1 Input)	DDC2B (RGB1 Input)	DDC2B (RGB1 Input)	DDC2B	DDC2B	
FEATURES										
Speaker	10W Mono	10W Mono	6W Mono	1W Mono	10W Mono	1W Mono	10W Mono	7W Mono	6W Mono	
Basic functions	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Auto signal Search	Freeze, Magnifying, Blank, Auto adjustment, Auto signal Search	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Search	Freeze, Magnifying, Blank, Auto adjustment, Search	
Picture adjustments	Digital zoom x 1.35, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction	Digital zoom x 1.38, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction	Digital zoom x 1.2, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Equalising Colour Temperature	Digital zoom x 1.35, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction	Digital zoom x 1.35, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction	Digital zoom x 1.35, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction	Digital zoom x 1.38, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Equalising Colour Temperature Adjustment	Digital zoom x 1.2, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Equalising Colour Temperature Adjustment	Digital zoom x 1.2, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Equalising Colour Temperature Adjustment	
Digital keystone	Manual V keystone	Manual V keystone	Adjustment Manual V keystone	Manual V keystone	Manual V keystone ±6 degrees	Manual V keystone ±6 degrees	Manual V keystone	Manual V keystone	Manual V keystone	
Advanced features	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through, Perfect Fit	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through	MyScreen, My Memory, My Button, Normal/Cinema/Dynamic/Blackboard/ Greenboard/Whiteboard modes, Daytime mode, Resolution setting, Input source naming (English)	MyScreen, My Memory, My Button, Normal/Cinema/Dynamic/Blackboard/ Greenboard/Whiteboard modes, Daytime mode, Resolution setting, Input source naming (English), Perfect Fit 2.0
Outward	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Back side filter	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Air filter slides towards front side or top	Easy lamp replace from top, Back side filter	Easy lamp replace from top, Back side filter	
Power on & off	Quick Power On (9 sec), Direct On, Auto Off	Quick Power On (9 sec), Direct On, Auto Off	Quick On, Direct On, Direct Off	Quick Power On (9 sec), Direct On, Auto Off	Quick Power On, Direct On, Auto Off	Quick Power On, Direct On, Auto Off	Quick Power On (9 sec), Direct On, Auto Off	Quick On, Direct On, Direct Off	Quick On, Direct On, Direct Off	
Security systems	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	PIN-Lock, MyScreen PIN-Lock, Keypad-Lock, Kensington slot, Security bar, Focus Lock	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label	PIN-Lock, MyScreen PIN-Lock, Keypad Lock, Kensington slot, E-mail alert, Transition detector	PIN-Lock, MyScreen PIN-Lock, Keypad Lock, Kensington slot, Transition detector, My Text, Security label	
Network	Configure and control projector via web browser, receive alerts via e-mail, projector management via SNMP, Scheduling, My Image, Command Control via network, Messenger, AMX Device Discovery, PJ Link™, Network Bridge	Configure and control projector via web browser, receive alerts via e-mail, projector management via SNMP, Scheduling, My Image, Command Control via network, Messenger, AMX Device Discovery, PJ Link™, Network Bridge	–	–	–	–	–	Configure and control projector via web browser, receive alerts via e-mail, projector management via SNMP, Scheduling, My Image, Command Control via network	–	
CONNECTIONS										
Digital input	1 x HDMI	1 x HDMI	–	–	1 x HDMI	–	1 x HDMI	–	–	
Computer input	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	2 x 15-pin Mini D-sub	
Computer output	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	1 x 15-pin Mini D-sub	
Video input	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x Component 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video	2 x Component D-sub (shared with analogue RGB) 1 x Component 1 x RCA for composite 1 x Mini-DIN for S-Video	
Audio input	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	2 x Stereo Mini Jack 1 x pair RCA (L/R) (Selectable on OSD)	
Audio output	1 x pair RCA (L/R)	1 x pair RCA (L/R)	1 x Stereo Mini Jack	1 x pair RCA (L/R)	1 x pair RCA (L/R)	1 x pair RCA (L/R)	1 x pair RCA (L/R)	1 x Stereo Mini Jack	1 x Stereo Mini Jack	
Control	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control AMX Device Discovery	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control AMX Device Discovery	1 x 9-pin D-sub for RS-232C control	1 x 9-pin D-sub for RS-232C control	
Network	1 x RJ-45	1 x RJ-45	–	–	1 x RJ-45	–	1 x RJ-45	1 x RJ-45	–	
POWER										
Power supply	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	100-120V/220-240V, auto switching	
Power Consumption/Standby	270W/<1W	270W/<1W	340W/<5W	250W/<1W	270W/<1W	270W/<1W	280W/<1W	270W/<1W	340W/<5W	
PHYSICAL										
Dimensions (W x H x D)	333 x 103 x 303mm (excluding feet and extrusions)	333 x 118 x 303mm (excluding feet and extrusions when mirror closed)	397 x 131 x 356mm (excluding feet and extrusions when mirror closed)	333 x 103 x 303mm (excluding feet and extrusions)	333 x 103 x 303mm (excluding feet and extrusions)	333 x 103 x 303mm (excluding feet and extrusions)	333 x 103 x 303mm (excluding feet and extrusions)	397 x 131 x 356mm (excluding feet and extrusions when mirror closed)	397 x 131 x 356mm (excluding feet and extrusions when mirror closed)	
Weight	3.7Kg	4.8Kg	5.8Kg	3.5Kg	3.7Kg	3.7Kg	3.7Kg	4.8Kg	5.9Kg	
Noise level	36dB (Bright Mode)/28dB (Normal Mode)	36dB (Bright Mode)/28dB (Normal Mode)	33dB (Bright Mode)/28dB (Normal Mode)	36dB (Normal Mode)/28dB (Eco Mode)	36dB (Normal Mode)/28dB (Eco Mode)	36dB (Normal Mode)/28dB (Eco Mode)	36dB (Normal Mode)/28dB (Eco Mode)	36dB (Normal Mode)/28dB (Eco Mode)	35dB (Normal Mode)/29dB (Eco Mode)	
Air filter	Hybrid	Hybrid	Hybrid	Hybrid	Hybrid	Hybrid	Hybrid	Hybrid	Hybrid	
MISCELLANEOUS										
	Lamp indicator light, Power light, Ceiling mount image, Rear projection image, Serial number label on side	Lamp indicator light, Power light, Ceiling mount image, Rear projection image, Serial number label on side	Lamp indicator light,							

*The stated lamp life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps should achieve this figure. **Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). The "HD ready" Logo is a trademark of EICTA. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. The specification above and photography is for reference only and may be subject to change.


What is Short Throw?

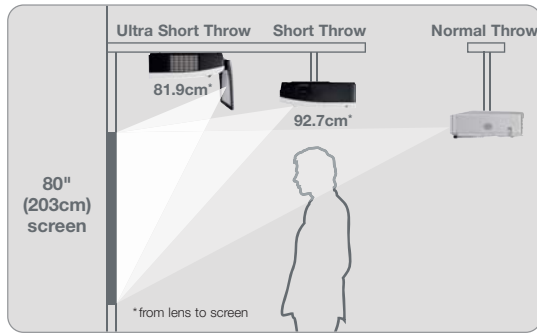

Short Throw projection is the ability to project high quality large images over considerably shorter distances than normal throw projectors. This is especially beneficial when trying to project in tight spaces or small rooms.



An example of Short Throw: With a distance-to-width ratio of 0.5, the projector would need to be positioned 0.5m from the screen to achieve a 1m wide image. Ultra Short Throw Projectors are capable of even shorter throw distances for large, bright images.

Ultra Short Throw applications





False/High ceilings

Rooms with awkward ceilings – the Ultra Short Throw projectors can be wall mounted, therefore problems relating to large voids above suspended ceilings are a thing of the past. Restrictions associated with installing projectors in listed architecture, for example, churches and rooms with air conditioning ducts or cabling situated in ceiling voids can be easily overcome.



Shop window

Ultra Short Throw Technology opens up a world of new possibilities in retail and digital signage applications. From shop window installations to interactive maps in airport lounges, images can be projected on to surfaces that were never thought possible, and all to enhance the customer experience.




Entertainment

Get closer to the action than ever. Create an immersive experience by projecting large screens for gaming and videos with no shadowing effects.

Rear projection

Ideal for rear projection due to the short throw distance, resulting in a clean and compact space-saving installation.




Why buy Hitachi?




Safe for young eyes

Our projectors are designed so that the light beam is located as close to the screen as possible, as recommended by British Educational Communications and Technology Agency (BECTA) and Health and Safety Executive (HSE).

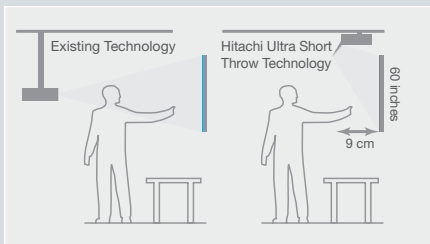


No glare or shadows

Traditional projectors dazzle people, Hitachi's unique Ultra Short Throw Technology means if you stand in front of the projector the light beam won't shine in your eyes.

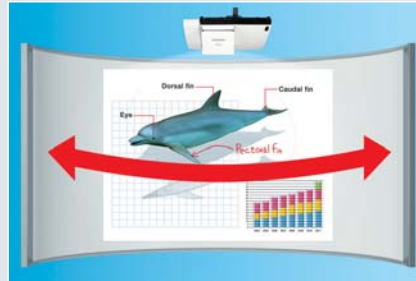

Perfect Fit

Perfect Fit enables quick adjustment of the projected image by moving its four corners one at a time. In addition, barrel or pincushion distortion, which occur on blackboards or whiteboards with rounded surfaces, can easily be corrected. Making adjustments is easy with the remote control and the on-screen operating menu.



Adjust each of the four corners.



Adjust for barrel or pincushion distortion that occurs on rounded surfaces.




Versatile Security Functions

Projectors are equipped with a security bar allowing a chain to be attached. The MyScreen function can be used for owner identification and is also protected by a PIN-Lock.



Easy Maintenance

The lamp door is on the top and the filter cover on the back, so maintenance and replacement of these parts can be made easily.



Normal



Daytime Mode

Daytime Mode

Projected images may sometimes be difficult to see under bright lighting. The Daytime Mode uses image quality correction technology to counter the effects of light, ensuring clear, vivid images.