

# ED-X26

INNOVATE  
The Future of Projection



## EDUCATION LCD PROJECTOR

Hitachi's ED-X26 offers powerful performance in a light weight and compact design. With its customisable 'My Button', template functions and zoom this projector is ideal for education environments.

### Performance

- XGA resolution
- 1500 ANSI Lumens (Normal Mode)
- Direct on and Auto off
- 500:1 Contrast ratio
- Low noise level - 28dB in Normal Mode
- Daytime Mode
- Blackboard and Whiteboard Modes
- Customisable 'My Button'
- Anti Theft features:
  - Security bar
  - PIN-Lock
  - MyScreen PIN-Lock
  - Keypad Lock
  - Kensington Lock
  - Transition detector

### Cost of ownership

- Long lamp life - 4000 hours (Normal Mode)\*
- Easy set up and installation
- Power saving mode

### Environment

- Reduced carbon footprint by extended service intervals
- Reduced power consumption - Less than 0.5W in Standby Mode

*Hitachi have formulated an "Environmental Vision" to contribute towards building a sustainable society through business and product development.*

*Our goal is to develop life-enhancing technology that will contribute to and realise a truly sustainable society for current and future generations.*



[www.hitachidigitalmedia.com](http://www.hitachidigitalmedia.com)

**HITACHI**  
Inspire the Next

# ED-X26 Technical specifications


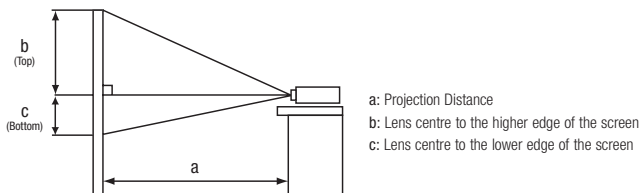


Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	0.9	1.1	39	7
40" (1.0m)	1.2	1.4	52	9
50" (1.3m)	1.5	1.8	65	11
60" (1.5m)	1.8	2.2	78	13
80" (2.0m)	2.4	2.9	105	17
100" (2.5m)	3.0	3.6	131	22
150" (3.8m)	4.5	5.4	196	33
200" (5.1m)	6.1	7.3	261	44
300" (7.6m)	9.1	10.9	392	65

Image Size 16:9				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	1.0	1.2	36	1
40" (1.0m)	1.3	1.6	49	1
50" (1.3m)	1.6	2.0	61	1
60" (1.5m)	2.0	2.4	73	2
80" (2.0m)	2.6	3.2	97	2
100" (2.5m)	3.3	4.0	122	3
150" (3.8m)	4.9	5.9	182	4
200" (5.1m)	6.6	7.9	243	6
300" (7.6m)	9.9	11.9	365	9

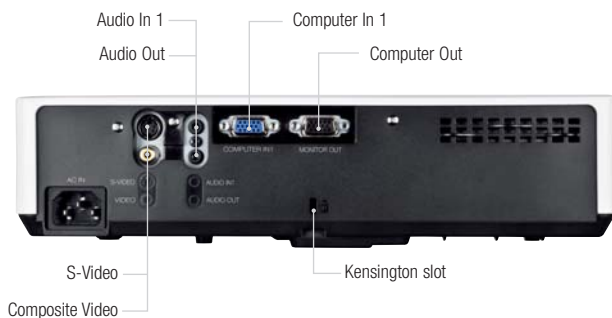

HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM

Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 500 www.hitachidigitalmedia.com

\*The stated lamp life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps should achieve this figure. \*\*Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). The specification above and photography is for reference only and may be subject to change.

## OPTICAL

LCD Panel	0.63" (1.6cm) P-Si TFT x 3
Resolution	XGA (1024 x 768)
Brightness	Bright Mode Normal Mode
	2200 ANSI Lumens 1500 ANSI Lumens
Contrast ratio	500:1
Lens	Manual focus, manual zoom x 1.2
Lamp wattage	200W UHB
Lamp life	3000 hours (Bright Mode)/4000 hours (Normal Mode)*
Distance to width ratio	1.5 (Wide), 1.8 (Tele)
Diagonal display size	30~300" (76~762cm)
Number of colours	8 Bit/colour, 16.7M colours
Keystone correction	Fixed, 6:1 upward shift

## COMPATIBILITY

Computer compatibility	IBM Compatible VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WXGA+, MAC 16"
Composite/S-Video	NTSC/PAL/SECAM/PAL-M/PALN/NTSC4.43/PAL60
Component video	525i(480i), 525p(480p), 625i(576i), 1125i (1080i @50/60), 750p(720p@50/60), 1125p(1080p@50/60)
Plug & Play	DDC2B

## FEATURES

Speakers	1W Mono
Basic functions	Freeze, Magnifying, Blank, Auto adjustment, Auto signal search
Picture adjustments	Digital zoom 1.35, Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction
Digital keystone	Manual V keystone $\pm 30$ degrees (@XGA 60Hz)
Advanced features	MyScreen, My Memory, Blank/My Button, My Text, My Source, blackboard/whiteboard mode, Daytime Mode, Input Source Naming (English), resolution setting, Template, Closed Caption (for NTSC & component 480i only), Audio pass through
Outward	Easy lamp replace from top, Air filter on side
Power on & off	Quick Power On, Direct On, Auto Off
Security systems	Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text
OSD languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil)

## CONNECTIONS

Computer input	1 x 15-pin Mini D-sub
Computer output	1 x 15-pin Mini D-sub
Video input	1 x Component D-sub (shared with analogue RGB) 1 x RCA for composite 1 x Mini-DIN for S-Video
Audio input	1 x Stereo Mini Jack
Audio output	1 x Stereo Mini Jack

## POWER

Power supply	100-120V/220-240V, auto switching
Power Consumption/Standby	270W/<0.5W

## PHYSICAL

Dimensions (W x H x D)	306 x 77 x 221mm (excluding feet and extrusions)
Weight	2.2Kg
Noise level	35dB (Bright Mode)/28dB (Normal Mode)
Air filter	Urethane

## MISCELLANEOUS

Lamp indicator light, Power light, Ceiling mount image, Rear projection image, Serial number label on side

## CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, CE, AS/NZS CISPR22 ClassB

## ACCESSORIES SUPPLIED


Remote control with batteries, Computer cable, Power cord, Lens cap, Security label, User manual (detail & concise)

## OPTIONAL ACCESSORIES

Replacement lamp	DT01151
------------------	---------

## WARRANTY

Projector warranty	3 Years
Lamp warranty	3 Years**

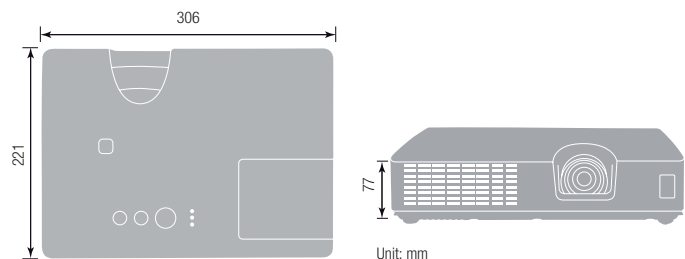

Unit: mm

