
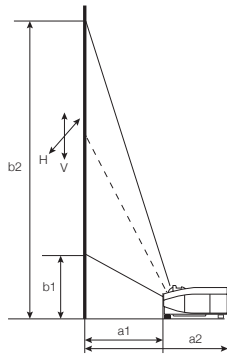


## Technical Specifications

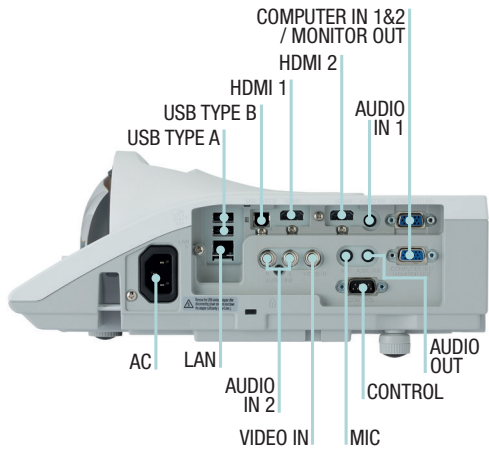

THROW DISTANCE – XGA 4:3						
Screen size (diagonal)	H x V		a1	a2	b1	b2
	(m)	(m)				
60" (1.52m)	1.2	0.9	0.691	0.994	0.155	1.069
70" (1.78m)	1.4	1.1	0.818	1.121	0.171	1.237
80" (2.03m)	1.6	1.2	0.946	1.249	0.186	1.405
90" (2.29m)	1.8	1.4	1.073	1.376	0.202	1.573
100" (2.54m)	2.0	1.5	1.201	1.504	0.217	1.741
120" (3.05m)	2.4	1.8	1.456	1.759	0.249	2.077
150" (3.81m)	3.0	2.3	1.838	2.141	0.295	2.581

THROW DISTANCE – WXGA 16:10						
Screen size (diagonal)	H x V		a1	a2	b1	b2
	(m)	(m)				
60" (1.52m)	1.3	0.8	0.735	1.038	0.242	1.050
70" (1.78m)	1.5	0.9	0.870	1.173	0.272	1.214
80" (2.03m)	1.7	1.1	1.006	1.309	0.302	1.379
90" (2.29m)	1.9	1.2	1.141	1.444	0.331	1.543
100" (2.54m)	2.2	1.3	1.276	1.579	0.361	1.707
120" (3.05m)	2.6	1.6	1.547	1.850	0.420	2.035
150" (3.81m)	3.2	2.0	1.953	2.256	0.508	2.528

OPTICAL	
LCD panel	0.59" aspect ratio 16:10
Resolution	WXGA (1280 x 800)
Brightness	3100 ANSI Lumens (Normal Mode) / 2542 ANSI Lumens (Eco Mode 1) / 2077 ANSI Lumens (Eco Mode 2)
Contrast ratio	10000:1
Lens	Manual focus, digital zoom x 1.35
Lamp wattage	225W UHP
Lamp life*	5000 hours (Normal Mode) / 8000 hours (Eco1) / 10000 (Eco2)
Focus distance	0.735m - 1.953m
Distance to width ratio	0.6
Diagonal display size	60 - 150"
Keystone correction	Fixed 5.6 : -1 upward shift, normal at + 36.6° projection angle
Number of colours	16.7 million

COMPATIBILITY	
Computer compatibility	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed) MAC16"
Composite / S-video	NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43
Component video / HDMI video	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)
Plug & play	DDC2B

FEATURES	
Speakers	16W x 1 (mono)
Basic functions	Freeze, magnifying, blank, auto signal search, auto eco mode
Picture adjustments	2-3 pull down for NTSC, digital image shift (vertical), equalizing colour, temperature adjustment, equalizing digital gamma correction, mirror reverse image, up-side down image, video noise reduction

Advanced features	Audio ports assign, closed caption (for NTSC & 480i), drawing function (requires TB-1 wireless interactive tablet, Eco Mode (normal, Eco, intelligent eco, saver), filter timer, frame lock, My Button by remote control, My Memory, My Source, My Text, MyScreen, overscan, PC-less presentation, picture mode (normal, cinema, dynamic, board (black), board (green), whiteboard, daytime, photo), progressive scan, resolution setting, source naming (English), standby audio, template, USB Display, ImageCare™, cloning function, iOS connectivity, Android connectivity
-------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Outward	Easy lamp replace from top, easy access air filter
Power on & off	Direct on, auto off
Security systems	Password / My screen Password, Pin Lock, Key Lock

Network	Project Monitoring (Wired LAN), Control from Remote Location (Wired LAN), E-mail alerts (Wired LAN), mirroring of PC screen (used the LiveViewer soft), infrastructure mode (Wireless LAN), Adhoc mode (Wireless LAN), SNMP Management (SNMP), cloning function, easy schedule setting
---------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

OSD languages	33 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese)
---------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

CONNECTIONS	
Digital input	2 x HDMI (HDCP compliant)
Computer input	2 x 15-pin Mini D-sub
Monitor output	1 x 15-pin Mini D-sub
Video input	1 x RCA connector
Audio input	3.5mm stereo mini connector, 1 x pair RCA (L/R)
Audio output	1 x 3.5mm stereo mini connector
Control	1 x 9-pin D-sub for RS-232C control
Wired network	1 x RJ-45
Wireless LAN	Optional wireless adapter required
USB	2 x USB Type A (PC less presentation or wireless adapter) 1 x USB Type B (USB display, or USB mouse control)

POWER	
Power supply	100-120V/220-240V, auto switching
Power consumption / standby	320W/<0.35W (AC 220-240V)

PHYSICAL	
Dimensions (W x H x D)	345 x 85 x 303mm (excluding feet and extrusions)
Weight	3.6kg
Noise level	37dB (Normal Mode) / 32dB (Eco1) / 29dB (Eco2)
Air filter*	Hybrid (up to 5000 hours)

CERTIFICATION	
UL, CB, GS, AUS, FCC, C-TICK, CE, DOC	

ACCESSORIES SUPPLIED	
Power cable, computer cable, remote control (HL03035) with batteries, lens cover and cap, adapter cover (for USB wireless adapter), security Label, user manual (CD & book), application CD	

OPTIONAL ACCESSORIES	
Replacement lamp	DT01511
Remote	HL03035
USB Wireless Adapter	USB-WL-11N

Warranty	
Projector / lamp	3 Years / 6 Months** (for education and extended warranties please contact your local dealer.)



\*The stated lamp and filter life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps and filters should achieve this figure. \*\*Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. AMX and the AMX logo, and Device Discovery are all registered trademarks of AMX. Crestron® and RoomView™ are registered trademarks or trademark of Crestron Electronics, Inc. The specification above and photography is for reference only and may be subject to change.