

ED-X50 ED-X52

INNOVATE
The Future of Projection



ED-X50



ED-X52

EDUCATION LCD PROJECTOR

Our new and compact ED-X50 and ED-X52 combine advanced usability functions and long life parts making them virtually maintenance free and an ideal solution for teaching environments.

Performance

- XGA resolution
- 1500 ANSI Lumens (Normal Mode)
- Direct on and Auto off
- 500:1 Contrast ratio
- Low noise level - 28dB in Normal Mode
- Daytime Mode
- Blackboard and Whiteboard Modes
- Anti Theft features:
 - Security bar
 - PIN-Lock
 - MyScreen PIN-Lock
 - Keypad Lock
 - Kensington Lock
 - Transition Detector

Cost of ownership

- Extended Hybrid Filter life with 4000 hour filter
- Long lamp life - 4000 hours (Normal Mode)*
- No additional filter cleaning costs
- Easy set up and installation
- Power saving mode
- Virtually maintenance free

Environment

- Reduced carbon footprint by extended service intervals
- The Hybrid Filter reduces electronic waste
- Reduced power consumption - Less than 0.5W in Standby Mode

Hitachi have formulated an "Environmental Vision" to contribute towards building a sustainable society through business and product development.

Our goal is to develop life-enhancing technology that will contribute to and realise a truly sustainable society for current and future generations.



www.hitachidigitalmedia.com

HITACHI
Inspire the Next

ED-X50 ED-X52

Technical specifications



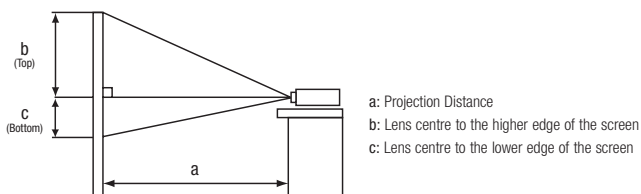


Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	0.9	1.1	39	7
40" (1.0m)	1.2	1.5	52	9
50" (1.3m)	1.5	1.8	65	11
60" (1.5m)	1.8	2.2	78	13
80" (2.0m)	2.4	3.0	105	17
100" (2.5m)	3.1	3.7	131	22
150" (3.8m)	4.6	5.6	196	33
200" (5.1m)	6.1	7.4	261	44
300" (7.6m)	9.2	11.2	392	65

Image Size 16:9				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	Wide. (m)	Tele. (m)	b (top)	c (bottom)
30" (0.8m)	1.0	1.2	36	1
40" (1.0m)	1.3	1.6	49	1
50" (1.3m)	1.7	2.0	61	1
60" (1.5m)	2.0	2.4	73	2
80" (2.0m)	2.7	3.2	97	2
100" (2.5m)	3.3	4.0	122	3
150" (3.8m)	5.0	6.1	182	4
200" (5.1m)	6.7	8.1	243	6
300" (7.6m)	10.1	12.2	365	9

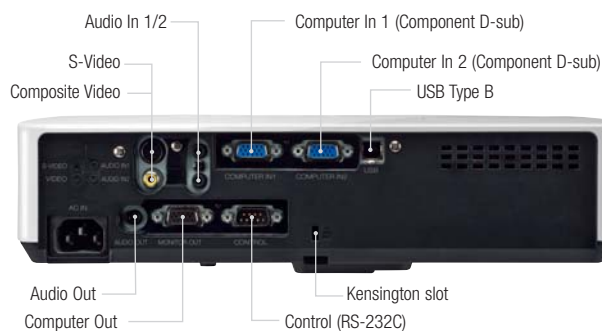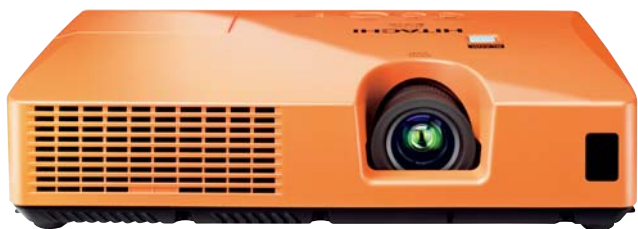

HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM

Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 500 www.hitachidigitalmedia.com

*The stated lamp life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps should achieve this figure. **Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). The specification above and photography is for reference only and may be subject to change.

OPTICAL		
LCD Panel		0.63" (1.6cm) P-Si TFT x3
Resolution		XGA (1024 x 768)
Brightness	Bright Mode	2200 ANSI Lumens
	Normal Mode	1500 ANSI Lumens
Contrast ratio		500:1
Lens		Manual focus, manual zoom x 1.2
Lamp wattage		200W UHP
Lamp life		3000 hours (Bright Mode)/4000 hours (Normal Mode)*
Distance to width ratio		1.5 (Wide), 1.8 (Tele)
Diagonal display size		30~300" (76~762cm)
Number of colours		8 Bit/colour, 16.7M colours
Keystone correction		Fixed, 6:1 upward shift.
COMPATIBILITY		
Computer compatibility		IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, SXGA+, UXGA Compressed, MAC 16"
Composite/S-Video		NTSC/PAL/SECAM/PAL-M/PALN/NTSC4.43
Component video		525i(480i), 525p(480p), 625i(576i), 1125i (1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)
Plug & Play		DDC2B
FEATURES		
Speakers		1W mono
Basic functions		Freeze, Magnifying, Blank, Auto adjustment, Auto signal Search
Picture adjustments		Digital zoom x 1.35, Equalizing Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction
Digital keystone		Auto V keystone ± 30 degrees
Advanced features		MyScreen, My Memory, My Button, My Text, My Source, Blackboard/Whiteboard mode, Daytime Mode, Input Source Naming (English), Resolution setting, Template, Closed Caption (for NTSC only), Audio Pass Through
Outward		Easy lamp replace from top, Air filter slides towards front side or top
Power on & off		Quick Power On, Direct On, Auto Off
Security systems		Security bar, PIN-Lock, MyScreen Password, Keypad-Lock, Kensington slot, Transition detector, My Text, Security label
OSD languages		English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil)
CONNECTIONS		
Computer input		2 x 15-pin Mini D-sub
Computer output		1 x 15-pin Mini D-sub
Video input		2 x Component D-sub (shared with analogue RGB)
		1 x RCA for composite
		1 x Mini-DIN for S-Video
Audio input		2 x Stereo Mini Jack
Audio output		1 x Stereo Mini Jack
USB		1 x USB Type B
Control		1 x 9-pin D-sub for RS-232C control
POWER		
Power supply		100-120V/220-240V, auto switching
Power Consumption/Standby		270W/<0.5W
PHYSICAL		
Dimensions (W x H x D)		306 x 77 x 221mm (excluding feet and extrusions)
Weight		2.2Kg
Noise level		35dB (Bright Mode)/28dB (Normal Mode)
Air filter		Hybrid
MISCELLANEOUS		
Lamp indicator light, Power light, Ceiling mount image, Rear projection image, Serial number label on side		
CERTIFICATION		
UL60950-1/ cUL EU CE Marking EN61000-3-2, EN61000-3-3, EN55022, EN55024(EMC directive) EN60950-1 (Low voltage directive)		
ACCESSORIES SUPPLIED		
Remote control with batteries, Computer cable, Power cord, Lens cap, Security label, User manual (detail & concise)		
OPTIONAL ACCESSORIES		
Replacement lamp		DT01141
WARRANTY		
Projector warranty		3 Years
Lamp warranty		3 Years**

