

CP-EU5001WN

Our New Multi-purpose 3LCD Projector











Introducing our innovative multi-purpose 3LCD CP-EU5001WN projector which combines all our technical expertise with our market leading knowledge.

This new, multi-purpose projector can produce 5,000 ANSI Lumens brightness and has a 16,000:1 contrast ratio with a resolution of 1920x1200.

So whether you are on the move or in an office, our CP-EU5001WN multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

WUXGA 1920 x 1200 resolution

5,000 ANSI lumens white/colour output

16,000:1 Contrast Ratio


Images up to 300 "diagonal

Easy to use and simple to set-up

Please note: Content, technical specifications and images are subject to change.

CP-EU5001WN 3LCD Multi-purpose Projector Technical Specifications				
Display System	3LCD 16mm (0.64")		Digital Input	HDMI x 2
Aspect Ratio	16:10	An	alogue Input	15-pin Mi
Panel Structure	3LCD	,	Video Output	15 pin Mi
Resolution	WUXGA (1920 x 1200)		Audio Input	3.5mm St
Light Output (Brightness) ANSI Lumens (Normal)	5000 (Normal) / 3750 (Eco)		Audio Output	3.5mm St
Contrast Ratio	16000:1	RS-	232C Control	1 x 9-pin
Lamp Life (hours)	4500 (Normal) / 6000 (Eco)	,	Wireless LAN	USB-WL-
Lens	Built-in		MC	
Lens Zoom	Manual zoom x 1.6		Wired LAN	RJ45 coni
Lens Focus	Manual focus		USB Type-A	USB Type
Projection Lens F Number	1.65 - 2.15	_	USB Type B	USB Type
Focus Distance	0.8 – 8.4 m (Wide), 1.3 – 13.6 m (Tele)	P	ower Supply	AC 100V
Distance to Width Ratio/ Throw Ratio (:1)	1.3 (Wide) / 2.1 (Tele)		rating Power Consumption	400W
Diagonal Display Size	30 - 300"		andby Power Consumption	Less than
Installation	Ceiling, Tabletop, Rear		Weight	5.3kg
Speakers	16W MONO	Dimension	s (W x H x D)	413 x 123
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°	° Vertical + 30°	oise (Normal)	35dB (No
Picture Modes	Standard, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo, Dicom SIM		r Life (Hours)	10,000
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR,	Certification		CE Markir (Class A), (Low Volta
	Image blank by RS232C/Remote control, Image Optimizer, Magnify, Mirror reverse image, Up-side down image		Computer	IBM Com HD, UXG
Operating Features	Keystone V/H, PerfectFit, Standby Audio, Audio pass through, Cloning function, Easy schedule setting		Video	525i (480 1125i (10 1125p (10
Network Features	Wireless Capability(Option), Multi Projector, Moderator Control Mode, Projector Quick Connection (ios / Android app), Projector Monitornring and Control from a Remote Location, E-mail Alerts	Supplied	Accessories	Power Ca Control U Converter
Security Features	Password/Myscreen Password, Pin Lock, Key Lock			CD User I
Supported Languages	34 Languages (English, French, German, Spanish, Italian,		Accessories	USB-WL-
	Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish,		mote Control	HL03037
	Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian,	Replacemen	t Lamp, Filter	DT02061
	Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew)	Projector/ La	mp Warranty	3 years / 6 please cor

pecifications			
Digital Input	HDMI x 2 (HDCP compliant, HDMI 2 shared with MHL)		
Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1		
Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)		
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1		
Audio Output	3.5mm Stereo Mini Jack x 1		
RS-232C Control	1 x 9-pin D-Sub		
Wireless LAN	USB-WL-5G wireless adaptor (optional)		
Wired LAN	RJ45 connector x 1		
USB Type-A	USB Type A x 2 (PC less Presentation or Wireless adapter)		
USB Type B	USB Type B x 1 (USB mouse control)		
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)		
Operating Power Consumption	400W		
Standby Power Consumption	Less than 0.5W		
Weight	5.3kg		
Dimensions (W x H x D)	413 x 123 x 315mm		
Noise (Normal)	35dB (Normal) / 27dB (Whisper)		
Filter Life (Hours)	10,000		
Certification	CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant		
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, WSXGA+, HD, UXGA, WUXGA		
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)		
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m), Remote Control Unit x1, AA Batteries x2, Lens Cap x1, Adaptor Converter x1, USB Wireless Adaptor x1, Security Label x1, CD User Manual x1, Application CD		
Optional Accessories	USB-WL-5G (wireless adapter)		
Remote Control	HL03037		
Replacement Lamp, Filter	DT02061 (without Filter) / UX41161		
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)		

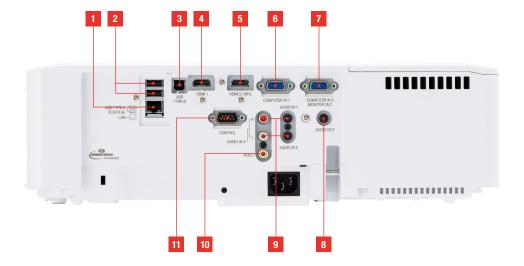

- **1.** LAN
- USB-A
 USB-B
- **4.** HDMI 1
- **5.** HDMI 2 (Supports MHL)
- **6.** Computer in 1
- 7. Computer in 2 / Monitor Out
- 8. Audio Out
- 9. Audio in
- 10. Video in
- 11. Control



