

HITACHI
Inspire the Next

CPX5

A HIGHLY COMPACT AND AFFORDABLE 3LCD PROJECTOR, DELIVERING THE PERFECT BALANCE OF FEATURES, PERFORMANCE AND DESIGN.

The CPX5 is the ultimate portable projector for the mobile business consumer. Combining stunning features with powerful performance in a lightweight and compact design, the CPX5 delivers whichever way you look at it.


- 2500 (Normal Mode)/
1800 (Whisper Mode) ANSI Lumens
- XGA Resolution
- High Connectivity
- Lightweight and Portable
- PC-less presentation via USB
- Short throw lens - 60"@1.5 m
- Auto Vertical Keystone Correction
- Quick-start (3 seconds)
- Instant OFF
- MyScreen Memory Image Store
- Whiteboard/Blackboard/Greenboard Modes




- **2500 ANSI Lumens (Normal Mode)** – with optical zoom, delivering crisp sharp images, which can be seen perfectly in all lighting conditions.
- **High Connectivity** – 2 x RGB in with audio in/out and versatile video connections.




- **Diagonal Display Size** – The CPX5 provides the biggest possible picture in the tightest space, projecting a 60" screen at 1.5m.




- **Quick Start and Instant Off** – These features are ideal for quick presentations. The image will appear in just 3 seconds after power on and the unit can be instantly powered off after a presentation.
- **Auto Vertical Keystone** – Keystone distortion occurs when the projector is inclined. This is automatically detected by a gravity sensor inside the projector and corrected.

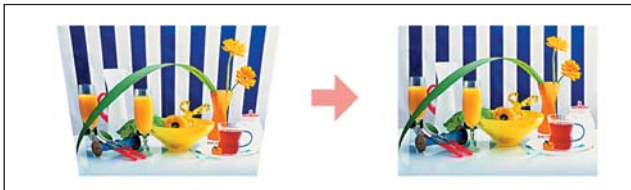

- **Whiteboard/Blackboard/Greenboard Modes** – Images displayed on whiteboards may be too bright, whiteboard mode changes the gamma curve to reduce the peak white brightness allowing users to enjoy the benefits of a bright projector but reducing potential health and safety risks of looking directly into one. Blackboard/Greenboard modes provide better colour balance when projecting onto a coloured background.

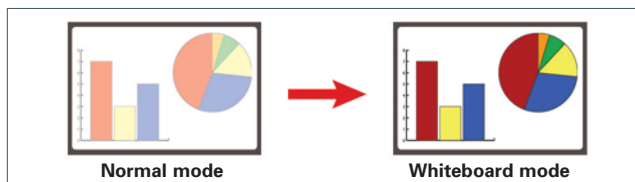

- **Security Functions** – CPX5 has an impressive suite of anti-theft measures:

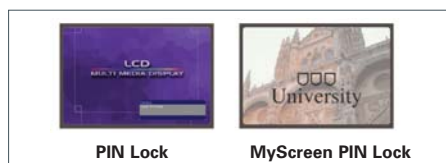

- PIN Lock is a means of in-activating the projector until a user preset key sequence is input
- 'MyScreen Lock' allows users to personalise the start up screen with a warning or ownership message and lock this screen with a pin code number
- Transition detector that operates whenever the projection angle or settings are changed from the installed position – this is locked by a numeric pin code.

CPX5 SPECIFICATION

OPTICAL				
LCD Panel	0.63" P-Si TFT x 3			
Resolution	XGA			
Brightness	Normal Mode	2500 ANSI Lumens		
	Whisper Mode	1800 ANSI Lumens		
Contrast Ratio	500:1			
Lens	Manual x 1.2 zoom			
Lamp	UHB190W			
Focus Distance	0.8-7.8m (WIDE), 0.9-9.3m (TELE)			
Distance to Width Ratio (:1)	1.3 (WIDE), 1.5 (TELE)			
Diagonal Display Size	30-300" (1.5m@60")			
COMPATIBILITY				
Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA/SXGA+, UXGA Compressed, MAC 16" (Pixelworks chip)			
Video Compatibility	NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)			
Plug & Play	DDC2B			
Frequency Range	FV 56-120Hz, FH 31.5-106KHz			
FEATURES				
Keystone Correction	6:1 upward shift, fixed			
Digital Keystone	Auto V keystone			
Speakers	1 x 1W			
Other: Variable Colour (R, G, B individual), MENU : 17 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Korean, Traditional Chinese, Swedish, Russian, Finnish, Polish, Turkish), Freeze Function, Magnifying, Digital gamma correction, My Memory, Auto configuration (H-Phase, H-Size, Position), PIN Lock system, Transition detector, MyScreen, Easy Operation : Quick On, Direct Off, Quick ON, Blackboard mode, Whiteboard mode, Input source naming				
CONNECTORS				
Computer Input	2 x 15-pin Mini D-sub			
Video Input	1 x Composite 1 x S-Video Jack 1 x Component (shared with D-sub 1)			
Audio Input	1 x Stereo Mini Jack			
Audio Output	1 x Stereo Mini Jack			
Control & Mouse	USB type B x 1 for mouse control			
USB type A x 1	• for PC-less presentation			
POWER				
Power Supply	100-120V/220-240V			
Power Consumption	310W			
PHYSICAL				
Dimensions (W x H x D)	274 x 59 x 205mm (excluding feet and extrusions)			
Weight	1.7Kg			
Noise Level	39dB Normal Mode/33dB Whisper Mode			
CERTIFICATION				
UL 60950-1/cUL, FCC Part15 subpart B class B, CE approval, EN61000-3-2, EN61000-3-3, EN55022, EN55024, EN60950-1, Low voltage directive, WEEE, Other AS/NZS CISPR22 class B				
MISCELLANEOUS				
Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image				
ACCESSORIES SUPPLIED				
RGB Cable, Remote Control, Batteries, Power Cord, Safety Instruction, Quick Guide, 14 Languages User Manual (English, French, German, Spanish, Italian, Norwegian, Dutch, Portuguese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish)				
OPTIONAL ACCESSORIES				
Replacement Lamp	DT00821			
<p>a: Projection Distance b: Lens centre to the higher edge of the screen c: Lens centre to the lower edge of the screen</p>				
Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
30" (0.8)	0.8	0.9	39.0	7.0
60" (1.5)	1.5	1.9	78.0	13.0
100" (2.5)	2.6	3.1	131.0	22.0
150" (3.8)	3.9	4.7	196.0	33.0
200" (5.1)	5.2	6.2	261.0	44.0
300" (7.6)	7.8	9.3	392.0	65.0
Image Size 16:9				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
30" (0.8)	0.8	1.0	37.0	1.0
60" (1.5)	1.7	2.0	73.0	2.0
100" (2.5)	2.8	3.4	122.0	3.0
150" (3.8)	4.2	5.1	183.0	4.0
200" (5.1)	5.6	6.8	243.0	5.0
300" (7.6)	8.5	10.2	365.0	8.0